

DATA SHEET

SURFACE-MOUNT CERAMIC MULTILAYER CAPACITORS

Class 2, Y5V

16/25/50 V



**Surface-mount ceramic
multilayer capacitors**

**Class 2, Y5V
16/25/50 V**

FEATURES

- Five standard sizes
- High capacitance per unit volume
- Supplied in tape on reel
- NiSn terminations.

APPLICATIONS

- Consumer electronics, for example:
 - Tuners
 - Television receivers
 - Video recorders
 - All types of cameras
 - Mobile telephones.

DESCRIPTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two terminations and finally covered with a layer of plated tin (NiSn). A cross section of the structure is shown in Fig.1.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Rated voltage U_R (DC)	16 V, 25 V, 50 V
Capacitance range (E6 series)	10 nF to 10 μ F; note 1
Tolerance on capacitance	$\pm 20\%$ (M); -20% to $+80\%$ (Z)
Test voltage (DC) for 1 minute:	$2.5 \cdot U_R$
Sectional specifications	IEC 60384-10, second edition 1989-04
Detailed specification	based on IEC 60384-10-1
End terminations	NiSn
Climatic category (IEC 60068)	30/85/21

Note

1. Measured at 25 °C, 1 V and 1 kHz, using a four-gauge method.

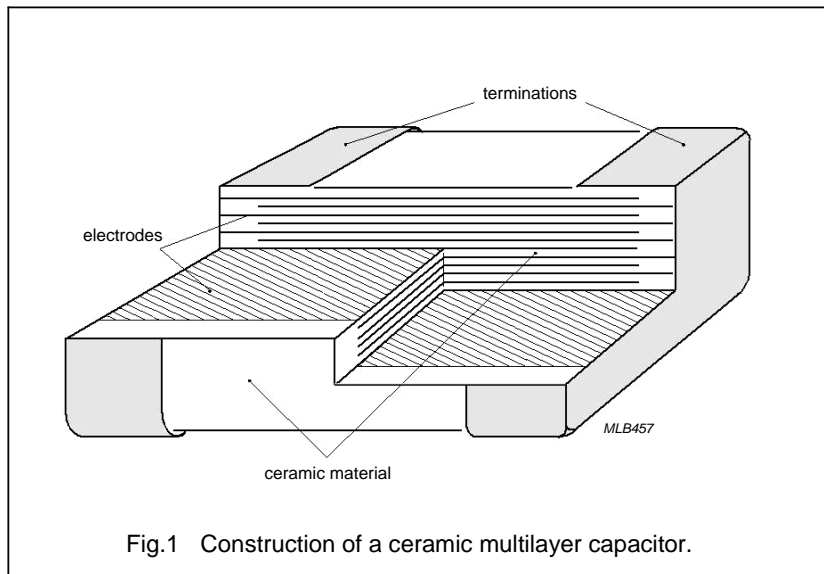
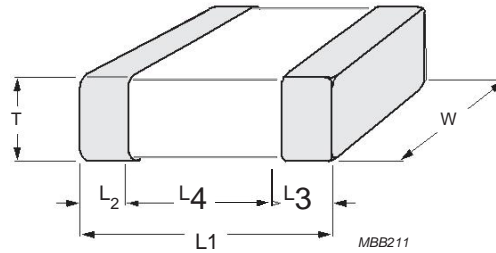


Fig.1 Construction of a ceramic multilayer capacitor.

**Surface-mount ceramic
multilayer capacitors**
**Class 2, Y5V
16/25/50 V**
MECHANICAL DATA

For dimensions see Table 1.

Fig.2. Component outline.

Physical dimensions**Table 1** Capacitor dimensions; see Fig.2

CASE SIZE	L ₁	W	T		L ₂ and L ₃		L ₄
			MIN.	MAX.	MIN.	MAX.	MIN.
Dimensions in millimetres							
0402	1.0 ±0.05	0.5 ±0.05	0.45	0.55	0.15	0.30	0.40
0603	1.6 ±0.10	0.8 ±0.07	0.73	0.87	0.25	0.65	0.40
0805	2.0 ±0.10	1.25 ±0.10	0.50	1.35	0.25	0.75	0.55
1206	3.2 ±0.15	1.6 ±0.15	0.50	1.75	0.25	0.75	1.40
1210	3.2 ±0.20	2.5 ±0.20	1.40	1.60	0.25	0.75	1.40
Dimensions in inches							
0402	0.040 ±0.002	0.020 ±0.002	0.018	0.022	0.008	0.012	0.016
0603	0.063 ±0.004	0.032 ±0.003	0.029	0.035	0.010	0.026	0.016
0805	0.079 ±0.004	0.049 ±0.004	0.020	0.053	0.010	0.030	0.022
1206	0.126 ±0.006	0.063 ±0.006	0.020	0.069	0.010	0.030	0.056
1210	0.126 ±0.008	0.098 ±0.008	0.047	0.069	0.010	0.030	0.056

**Surface-mount ceramic
multilayer capacitors**
**Class 2, Y5V
16/25/50 V**

SELECTION CHART FOR 16 V AND 25 V

C (nF)	LAST TWO DIGITS OF 12NC	16 V					25 V			
		0402	0603	0805	1206	1210	0603	0805	1206	1210
1	23									
1.5	25									
2.2	27									
3.3	29									
4.7	32									
6.8	34									
10	36	0.5 ±0.05					0.8 ±0.07			
15	38									
22	41									
33	43									
47	45									
68	47									
100	49							0.6 ±0.1	0.6 ±0.1	
150	52		0.8 ±0.07					0.85 ±0.1		
220	54									
330	56									
470	58			0.85 ±0.1					0.85 ±0.1	
680	61									
1,000	63				0.85 ±0.1				1.15 ±0.1	
2,200	67				1.15 ±0.1				0.85 ±0.1	
4,700	72				0.85 ±0.1				0.85 ±0.1	
10,000	76				1.15 ±0.1	1.5 ±0.1			1.15 ±0.1	1.5 ±0.1

Note

1. Values in shaded cells indicate thickness class in mm.

**Surface-mount ceramic
multilayer capacitors**
**Class 2, Y5V
16/25/50 V**

SELECTION CHART FOR 50 V

C (nF)	LAST TWO DIGITS OF 12NC	50 V		
		0603	0805	1206
10	05	0.8 ±0.07	0.6 ±0.1	
15	06			
22	07			
33	08			
47	09			
68	11			
100	12		0.85 ±0.1	0.6 ±0.1
150	13			
220	14			
330	15			0.85 ±0.1
470	16			
680	17			
1 000	18			1.15 ±0.1

Note

1. Values in shaded cells indicate thickness class in mm.

Thickness classification and packing quantities

THICKNESS CLASSIFICATION (mm)	8 mm TAPE WIDTH QUANTITY PER REEL				QUANTITY PER BULK CASE		
	180 mm; 7"		330 mm; 13"		0402	0603	0805
	PAPER	BLISTER	PAPER	BLISTER			
0.5 ±0.05	10 000	-	50 000	-	50 000	-	-
0.6 ±0.10	4 000	-	20 000	-	-	-	10 000
0.8 ±0.07	4 000	-	15 000	-	-	15 000	-
0.85 ±0.10	4 000	-	15 000	-	-	15 000	8 000
1.15 ±0.10	-	3 000	-	10 000	-	-	-
1.25 ±0.10	-	3 000	-	1 000	-	-	5 000
1.5 ±0.10	-	3 000	-	-	-	-	-


**Surface-mount ceramic
multilayer capacitors**

**Class 2, Y5V
16/25/50 V**

ORDERING INFORMATION

Components may be ordered by using either a Phycomp's unique 12NC or simple 15-digit clear text code.

Ordering code 12NC (preferred)

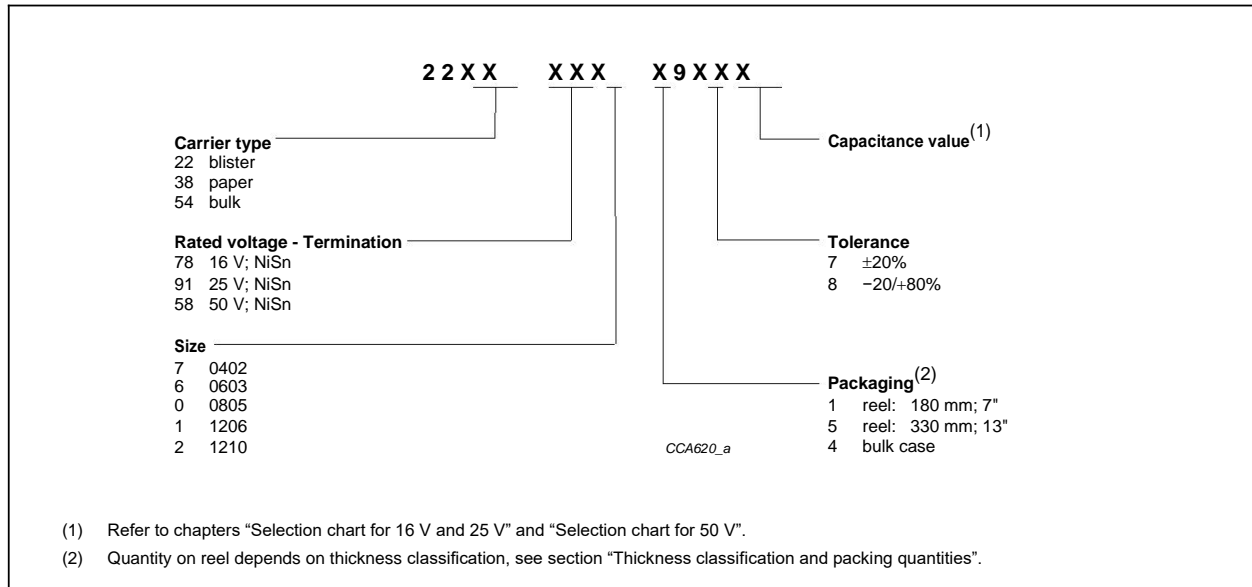




Phycomp Clear text code

EXAMPLE: 12062F105M8BB0D

Size Code	Temp. Char.	Capacitance	Tol.	Vol.	Termination	Packing	Marking	Series
0402 0603 0805 1206 1210	2F = Y5V	105 = 1000000 pF; the third digit signifies the multiplying factor: 2 = x 100 3 = x 1000 4 = x 10 000 5 = x 100 000 6 = x 1 000 000	M = ±20% Z = -20% /+80%	7 = 16 V 8 = 25 V 9 = 50 V	B = NiSn	2 = 180 mm; 7" paper 3 = 330 mm; 13" paper B = 180 mm; 7" blister F = 330 mm; 13" blister P = bulk case	0 = no marking	D = BME

**Surface-mount ceramic
multilayer capacitors**

**Class 2, Y5V
16/25/50 V**

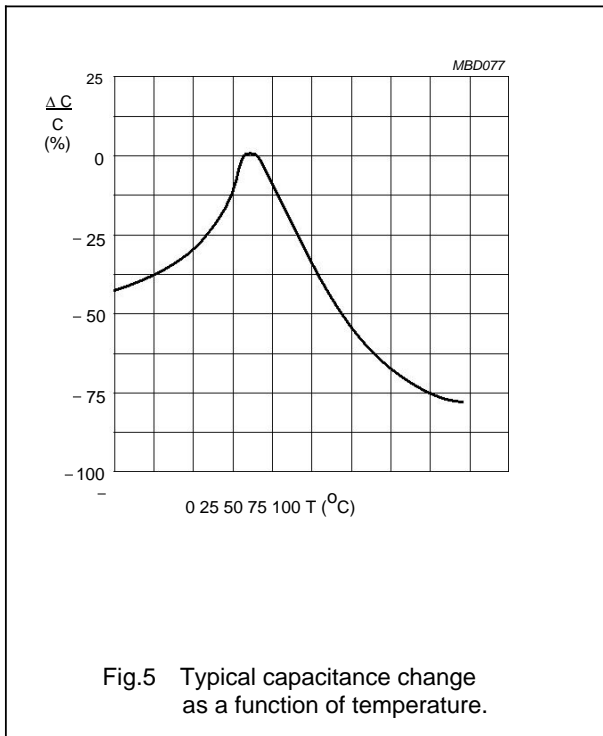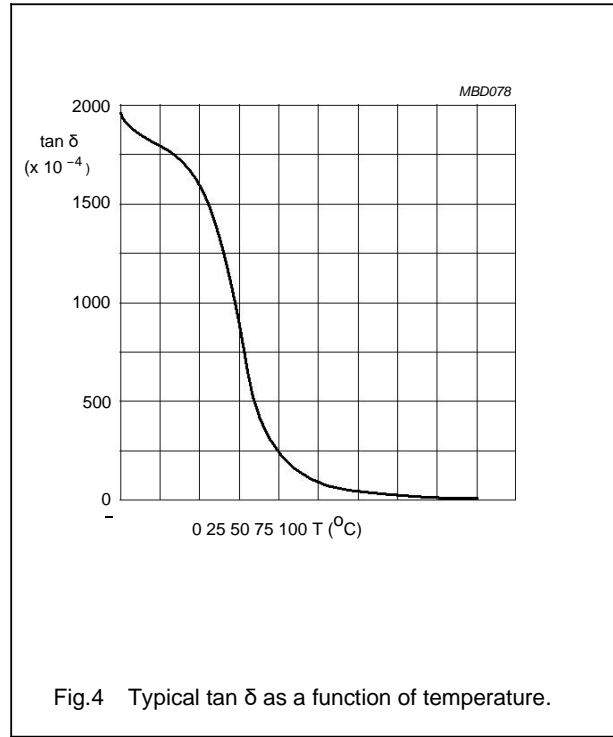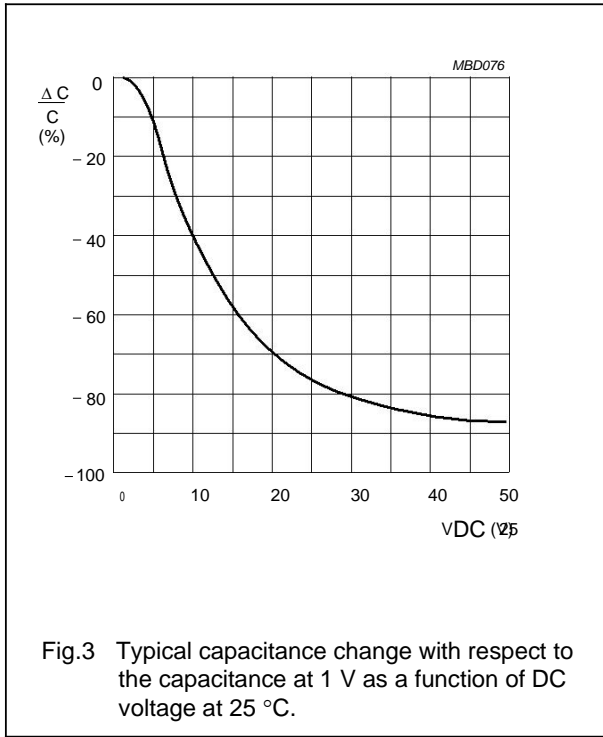

**Surface-mount ceramic
multilayer capacitors**
**Class 2, Y5V
16/25/50 V**
TESTS AND REQUIREMENTS
Table 2 Test procedures and requirements

IEC 60384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		mounting	the capacitors may be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	no visible damage
4.5		visual inspection and dimension check	any applicable method using $\cdot 10$ magnification	in accordance with specification
4.6.1		capacitance	$f = 1$ kHz; Y5V measuring voltage $1 V_{rms}$ at $25^\circ C$	within specified tolerance
4.6.2		$\tan \delta$	$f = 1$ kHz; Y5V measuring voltage $1 V_{rms}$ at $25^\circ C$	in accordance with specification
4.6.3		insulation resistance	at U_R (DC) for 1 minute	$R_{iCR} \geq 500$ s
4.6.4		voltage proof	$2.5 \cdot U_R$ for 1 minute	no breakdown or flashover
4.7.1		temperature coefficient	between minimum and maximum temperature	in accordance with specification
4.8		adhesion	a force of 5 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	no visible damage
4.9		bond strength of plating on end face	mounted in accordance with IEC 60384-1, paragraph 4.35	no visible damage
			conditions: bending 1 mm at a rate of 1 mm/s, radius jig 340 mm	$\Delta C/C: \leq 30\%$
4.10	Tb	resistance to soldering heat	preconditioning: 120 to $150^\circ C$ during 1 minute; $260 \pm 5^\circ C$ for 10 ± 0.5 s in a static solder bath	the terminations shall be well tinned after recovery $\Delta C/C: \pm 20\%$ $\tan \delta$: original specification R_{ins} : original specification
		resistance to leaching	$260 \pm 5^\circ C$ for 30 ± 1 s in a static solder bath	using visual enlargement of $\cdot 10$, dissolution of the terminations shall not exceed 10%

**Surface-mount ceramic
multilayer capacitors**
**Class 2, Y5V
16/25/50 V**

IEC 60384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.11	Ta	solderability	zero hour test, and test after storage (20 to 24 months) in original packing in normal atmosphere; unmounted chips completely immersed for 2 ± 0.5 s in a solder bath at 235 ± 5 °C	the terminations shall be well tinned
4.12	Na	rapid change of temperature	preconditioning: between minimum and maximum temperature, 5 cycles	no visible damage after 48 hours recovery: °C/C: $\leq \pm 20\%$
4.14	Ca	damp heat, steady state	initialization: 48 \pm 4 hours after UR at 40 °C for 1 hour (for initial value measurement); 500 \pm 12 hours at 40 °C; 90 to 95% RH; UR applied	no visible damage after 48 hours recovery: °C/C: +30%/-40% tan δ : $\leq 15\%$ Rins: 500 M Ω or RiCR ≥ 100 s, whichever is less
		damp heat; with UR load	initialization: 48 hours after UR at 40 °C; for 1 hour (for initial value measurement); 500 \pm 12 hours at 40 °C; 90 to 95% RH; UR applied	preconditioning: UR at 40 °C for 1 hour, after 48 hours recovery: °C/C: +30%/-40% tan δ : $\leq 15\%$ Rins: 500 M Ω or RiCR ≥ 25 s, whichever is less
4.15		endurance	initialization: 2 · UR at 85 °C for 1 hour, (initial value measurement after 48 \pm 4 hours) ; 2 · UR at 85 °C for 1000 hours recovery 48 \pm 4 hours at room temperature	after 48 hours recovery: °C/C: +30%/-40% tan δ : $\leq 15\%$ Rins: 1000 M Ω or RiCR ≥ 50 s, whichever is less

Phycomp

Product specification

**Surface-mount ceramic
multilayer capacitors**
**Class 2, Y5V
16/25/50 V**

REVISION HISTORY

Revision	Date	Change Notification	Description
Rev.11	Dec 26, 2005		Revised thickness of Y5V 0805 25/50 V 0.33 μ F
Rev 10	Sep 21, 2005	-	Y5V 0805 16 V thickness revised and range extended from 2.2 μ F to 4.7 μ F
Rev.9	June 24, 2005	-	- Revised thickness of: Y5V 1206 16 V from 4.7 μ F to 10 μ F Y5V1206 25 V from 2.2 μ F to 10 μ F
Rev.8	Jan 13, 2005	-	- Revised thickness of Y5V 0805 16 V 1 μ F and Y5V 0805 25 V 470 nF to 1 μ F
Rev.7	Jul 08, 2003	-	- Updated company logo